holm

Product Guide

ARCHITECTURAL & LANDSCAPE LIGHTING

A Hunter Industries Company

holmlighting.com

table of contents

finishes	3
control	5
directional fixtures	9
area fixtures	13
surface-mounted fixtures	17
recessed fixtures	19
pendant fixtures	23
in-grade fixtures	25
underwater fixtures	27
accessories	29

finishes

Natural Metals

CU
Copper

BS
Natural Brass

SS
Stainless Steel

Antique Finishes

AB on copper
Antique Bronze

AB on brass
Antique Bronze

AT on copper
Antique Tumbled

AT on brass
Antique Tumbled

Powder Coat Finish – Standard

BZ
Bronze Metallic

FW
Flat White

FB
Flat Black

SV
Silver

Powder Coat Finish – Custom

RA
RAL Color

control

COLOR SELECTION
Back
FIXTURE PROGRAMMING
ZDClink with Luxor® Technology

***ZDC**link*

Watts: 300
Material: Stainless Steel
Height: 13.0"/33.0 cm
Width: 8.0"/20.3 cm
Depth: 5.0"/12.7 cm
Finishes: SS

Options



SATlink



Wi-Fi Module



LAN Module

Light Assignment Module (LAM)

Luxor App



Luxor CUBE



ZD MR-16 Lamps

Main Features

- Create up to 250 independently adjustable lighting zones
- Compatible with Holm fixtures or devices containing ZD Technology™, or ZDC Technology™
- Turn on and dim each zone independently from 0-100%
- User interface includes a full-color LCD display for easy setup, maintenance, and adjusting of zones
- Uses event-based scheduling, allowing a single group of lights to change dimming percentages throughout the night
- Linking compatible with use of SATlink
- Optional iOS or Android control with the Wi-Fi module accessory (specify separately)
- Wirelessly assign fixtures to groups with the LAM accessory (specify separately)
- Offers 30,000 different color choices for unmatched ability to customize lighting for any application, season, or mood
- Create a personalized color palette that transcends colored filters
- Mix and match fixtures and devices with varying levels of control technology; combine Zoning, Zoning/Dimming, and/or Zoning/Dimming/Color

***ZD**link*

Watts: 300
Material: Stainless Steel
Height: 13.0"/33.0 cm
Width: 8.0"/20.3 cm
Depth: 5.0"/12.7 cm
Finishes: SS

Options



SATlink



Wi-Fi Module



LAN Module

Light Assignment Module (LAM)



Luxor App



Luxor CUBE



ZD MR-16 Lamps

Main Features

- Create up to 250 independently adjustable lighting zones
- Compatible with Holm fixtures or devices containing ZD Technology™
- Turn on and dim each zone independently from 0-100%
- User interface includes a full-color LCD display for easy setup, maintenance, and adjusting of zones
- Uses event-based scheduling, allowing a single group of lights to change dimming percentages throughout the night
- Linking compatible with use of SATlink
- Optional iOS or Android control with the Wi-Fi or LAN module accessories (specify separately)
- Wirelessly assign fixtures to groups with the LAM accessory (specify separately)
- Mix and match fixtures and devices with varying levels of control technology; combine Zoning, Zoning/Dimming

International

- 230V input power; power cord with country-specific plug type sold separately
- Translations available in: English, Spanish, French, Portuguese, Arabic, and Russian

***PRO**link*

Watts: 300, 600, 900
Material: Stainless Steel
Height: 13.5"/34.3 cm
Width: 7.5"/19.1 cm
Depth: 6.0"/15.2 cm
Finishes: SS, BZ, SV, FB, FW, RL

Options



PXSync
24V Relay

Main Features

- Stainless Steel Construction
- Open Switching Control Architecture: Any standard timer, photocell, manual switch, or “smart home” device may be used
- Extra Large Terminal Block: Each terminal can handle up to 16 12-gauge conductors
- Nickel-Plated Terminal Block Hardware: The ultimate conductive surface to minimize resistance
- Aerospace Circuit Breakers: These breakers are not temperature sensitive, which minimizes nuisance tripping so the transformer can be fully loaded
- Two-Inch Conduit Knock-Out: Allows installer to bring up to 20 cables to the terminal block

*LED **MR**-16 Lamps*

Model Configuration:

MR-16 [ ] [ ] [ ] [ ]

Technology
LED Std On/Off
ZD Zone/Dim

Halogen Equivalent
20 20W (Actual 4W)
35 35W (Actual 5W)

Color Temperature
W Warm (2700K)
C Cool (3900K)

Beam Angle
VN Very Narrow (10°)
NF Narrow Flood (25°)
FL Flood (35°)
WF Wide Flood (60°)

Description	Code
Base	GU5.3
Housing	Die-Cast Zinc
Input Voltage	10 to 15V
Lamp Life	40,000 Hours
Color Temperature (CCT)	2700K and 3900K
Beam Angles	10° - Very Narrow Flood 25° - Narrow Flood 35° - Flood 60° - Wide Flood
Compliance	UL, cUL, FCC, ROHS
Warranty	5 Year Limited

directional fixtures

*d**Crest**-13*

Lumens: 629-1856
Input Voltage: 110-277V
Material: Aluminum
Length: 11.5"/29.3 cm
LS Length: 12.3"/31.2 cm
Width: 5.0"/12.7 cm
Finishes: BZ, SV, FB, FW, RL

*d**Axis**-4*

Lumens: 62
Input Voltage: 10-15V
Material: Aluminum
Height: 5.8"/14.6 cm
Diameter: 1.8"/4.5 cm
Finishes: BZ, SV, FB, FW, RL

*d**Axis**-5*

Lumens: 60-165
Input Voltage: 10-15V
Material: Aluminum
Height: 7.5"/19.1 cm
Diameter: 2.0"/5.0 cm
Finishes: BZ, SV, FB, FW, RL

*d**Axis**-7*

Lumens: 50-360
Input Voltage: 10-15V
Material: Aluminum
Height: 8.4"/21.3 cm
LS Height: 10.3"/27.9 cm
Diameter: 2.7"/6.8 cm
Finishes: BZ, SV, FB, FW, RL

*d**Luna**-4*

Lumens: 62-124
Input Voltage: 10-15V
Material: Brass
Height: 5.3"/13.3 cm
LS Height: 6.4"/16.3 cm
Diameter: 1.6"/4.1 cm
Finishes: BS, AB, AT

*d**Luna**-7*

Lumens: 63-303
Input Voltage: 10-15V
Material: Brass
Height: 7.0"/17.8 cm
LS Height: 8.3"/21.2 cm
Diameter: 2.5"/6.4 cm
Finishes: BS, AB, AT

*d**Alta**-5*

Lumens: 65-167
Input Voltage: 10-15V
Material: Brass/Copper
Height: 6.7"/17.1 cm
LS Height: 7.5"/19.1 cm
Diameter: 2.0"/5.1 cm
Finishes: CU, AB, AT

*d**Alta**-7*

Lumens: 74-430
Input Voltage: 10-15V
Material: Brass/Copper
Height: 7.0"/17.0 cm
LS Height: 8.0"/20.0 cm
Diameter: 2.5"/6.4 cm
Finishes: CU, AB, AT

*d**Tessa**-6*

Lumens: 261-337
Input Voltage: 10-15V
Lamp: MR-16
Material: Aluminum
Height: 15.5"/39.4 cm
LS Height: 8.7"/22.1 cm
Diameter: 2.4"/6.1 cm
Finishes: BZ, SV, FB, FW, RL

*d**Fresco**-7*

Lumens: 73
Input Voltage: 10-15V
Material: Aluminum
Height: 6.0"/15.2 cm
Width: 2.9"/7.4 cm
Finishes: BZ, SV, FB, FW, RL

*d**Fresco**-9 (a)*

Lumens: 67-160
Input Voltage: 10-15V
Material: Brass or Aluminum
Height: 5.5"/13.9 cm
Width: 3.9"/9.8 cm
Finishes: BS, AT, AB, BZ, SV, FB, FW, RL

*d**Fresco**-11 (a)*

Lumens: 63-436
Input Voltage: 10-15V
Material: Brass or Aluminum
Height: 6.5"/16.5 cm
Width: 4.5"/11.4 cm
Finishes: BS, AB, AT , BZ, SV, FB, FW, RL

***d*Aria**

Lumens: 261-337
Input Voltage: 10-15V
Lamp: MR-16
Material: Brass
Height: 9.7"/24.6 cm
Diameter: 3.0"/7.6 cm
Finishes: BS

***d*Flip**

Lumens: 102-552
Input Voltage: 10-15V
Material: Aluminum
Height: 14.0"/35.6 cm
Depth: 5.5"/13.9 cm
Diameter: 3.9"/9.8 cm
Finishes: BZ, SV, FB, FW, RL

***d*Chaz**

Lumens: 261-337
Input Voltage: 10-15V
Lamp: MR-16
Material: Aluminum
Length: 9.7"/24.6 cm
SS Length: 9.7"/24.6 cm
Diameter: 3.0"/7.6 cm
Finishes: BZ, SV, FB, FW, RL

***d*Beam-5**

Lumens: 79
Input Voltage: 10-15V
Material: Aluminum
Length: 6.8"/17.3 cm
Diameter: 2.1"/5.3 cm
Finishes: BZ, SV, FB, FW, RL

***d*Beam-6**

Lumens: 49-122
Input Voltage: 10-15V
Material: Aluminum
Length: 8.9"/22.6 cm
Diameter: 2.4"/6.1 cm
Finishes: BZ, SV, FB, FW, RL

***d*Beam-8**

Lumens: 59-334
Input Voltage: 10-15V
Material: Aluminum
Length: 9.7"/24.6 cm
Diameter: 3.0"/7.6 cm
Finishes: BZ, SV, FB, FW, RL

area fixtures

*a**Rise**-26*

Lumens: 160-1,489
Input Voltage: 110V-277V
Material: Aluminum
Height: 42.0" /105.0 cm
Width: 9.7" /24.6 cm
Finishes: BZ, SV, FB, FW, RL

*a**Pillar***

Lumens: 50-360
Input Voltage: 10-15V
Material: Aluminum
Height: 14.0"/35.6 cm
XT Height: 18.5"/47.0 cm
Diameter: 2.5"/6.4 cm
Finishes: BZ, SV, FB, FW, RL

*a**Count**-10*

Lumens: 34
Input Voltage: 10-15V
Material: Copper/Brass
Height: 15.5"/39.4 cm
Diameter: 4.7"/11.9 cm
Finishes: CU, BZ, SV, FB, FW, RL, AB, AT

*a**Count**-18*

Lumens: 44-94
Input Voltage: 10-15V
Material: Copper/Brass
Height: 16.2"/41.2 cm
Diameter: 7.4"/18.8 cm
Finishes: CU, BZ, SV, FB, FW, RL, AB, AT

*a**Baron**-10*

Lumens: 34
Input Voltage: 10-15V
Material: Copper/Brass
Height: 15.5"/39.4 cm
Diameter: 4.7"/11.9 cm
Finishes: CU, BZ, SV, FB, FW, RL, AB, AT

*a**Baron**-18*

Lumens: 44-94
Input Voltage: 10-15V
Material: Copper/Brass
Height: 16.2"/41.2 cm
Diameter: 7.4"/18.8 cm
Finishes: CU, BZ, SV, FB, FW, RL, AB, AT

aDuke-10

Lumens: 19
Input Voltage: 10-15V
Material: Copper/Brass
Height: 15.5"/39.4 cm
Diameter: 3.6"/9.2 cm
Finishes: CU, BZ, SV, FB, FW, RL, AB, AT

aDuke-12a

Lumens: 44-94
Input Voltage: 10-15V
Material: Aluminum
Height: 15.0"/38.1 cm
Diameter: 5.0"/12.7 cm
Finishes: BZ, SV, FB, FW, RL

aDuke-18

Lumens: 39
Input Voltage: 10-15V
Material: Copper/Brass
Height: 15.0"/38.1 cm
Diameter: 6.3"/15.9 cm
Finishes: CU, BZ, SV, FB, FW, RL, AB, AT

aEmpress-10

Lumens: 39
Input Voltage: 10-15V
Material: Copper/Brass
Height: 15.0"/38.1 cm
Diameter: 4.0"/10.2 cm
Finishes: CU, BZ, SV, FB, FW, RL, AB, AT

aEmpress-15a

Lumens: 25-80
Input Voltage: 10-15V
Material: Aluminum
Height: 15.0"/38.1 cm
Diameter: 6.0"/15.2 cm
Finishes: BZ, SV, FB, FW, RL

aEmpress-18

Lumens: 35-93
Input Voltage: 10-15V
Material: Copper/Brass
Height: 16.2"/41.2 cm
Diameter: 7.1"/18.0 cm
Finishes: CU, BZ, SV, FB, FW, RL, AB, AT

*a**Empress**-25* Lumens: No Lamp
Input Voltage: 10-15V
Material: Copper/Brass
Height: 28.5"/72.4 cm
Diameter: 10.0"/25.4 cm
Finishes: CU, BZ, SV, FB, FW, RL, AB, AT

*a**Queen**-10* Lumens: 39
Input Voltage: 10-15V
Material: Copper/Brass
Height: 15.0"/38.1 cm
Diameter: 3.8"/9.7 cm
Finishes: CU, BZ, SV, FB, FW, RL, AB, AT

*a**Queen**-18* Lumens: 41-97
Input Voltage: 10-15V
Material: Copper/Brass
Height: 15.8"/40.1 cm
Diameter: 7.4"/18.8 cm
Finishes: CU, BZ, SV, FB, FW, RL, AB, AT

*a**Petal*** Lumens: 75-530
Input Voltage: 10-15V
Material: Copper/Brass
Height: 18.0"/45.7 cm
XT Height: 29.5"/74.9 cm
Diameter: 5.0"/12.7 cm
Finishes: CU, BZ, SV, FB, FW, RL, AB, AT

*a**Ember*** Lumens: 75-475
Input Voltage: 10-15V
Material: Copper/Brass
Height: 22.0"/55.9 cm
Diameter: 5.0"/12.7 cm
Finishes: CU, BZ, SV, FB, FW, RL, AB, AT

surface-mounted fixtures

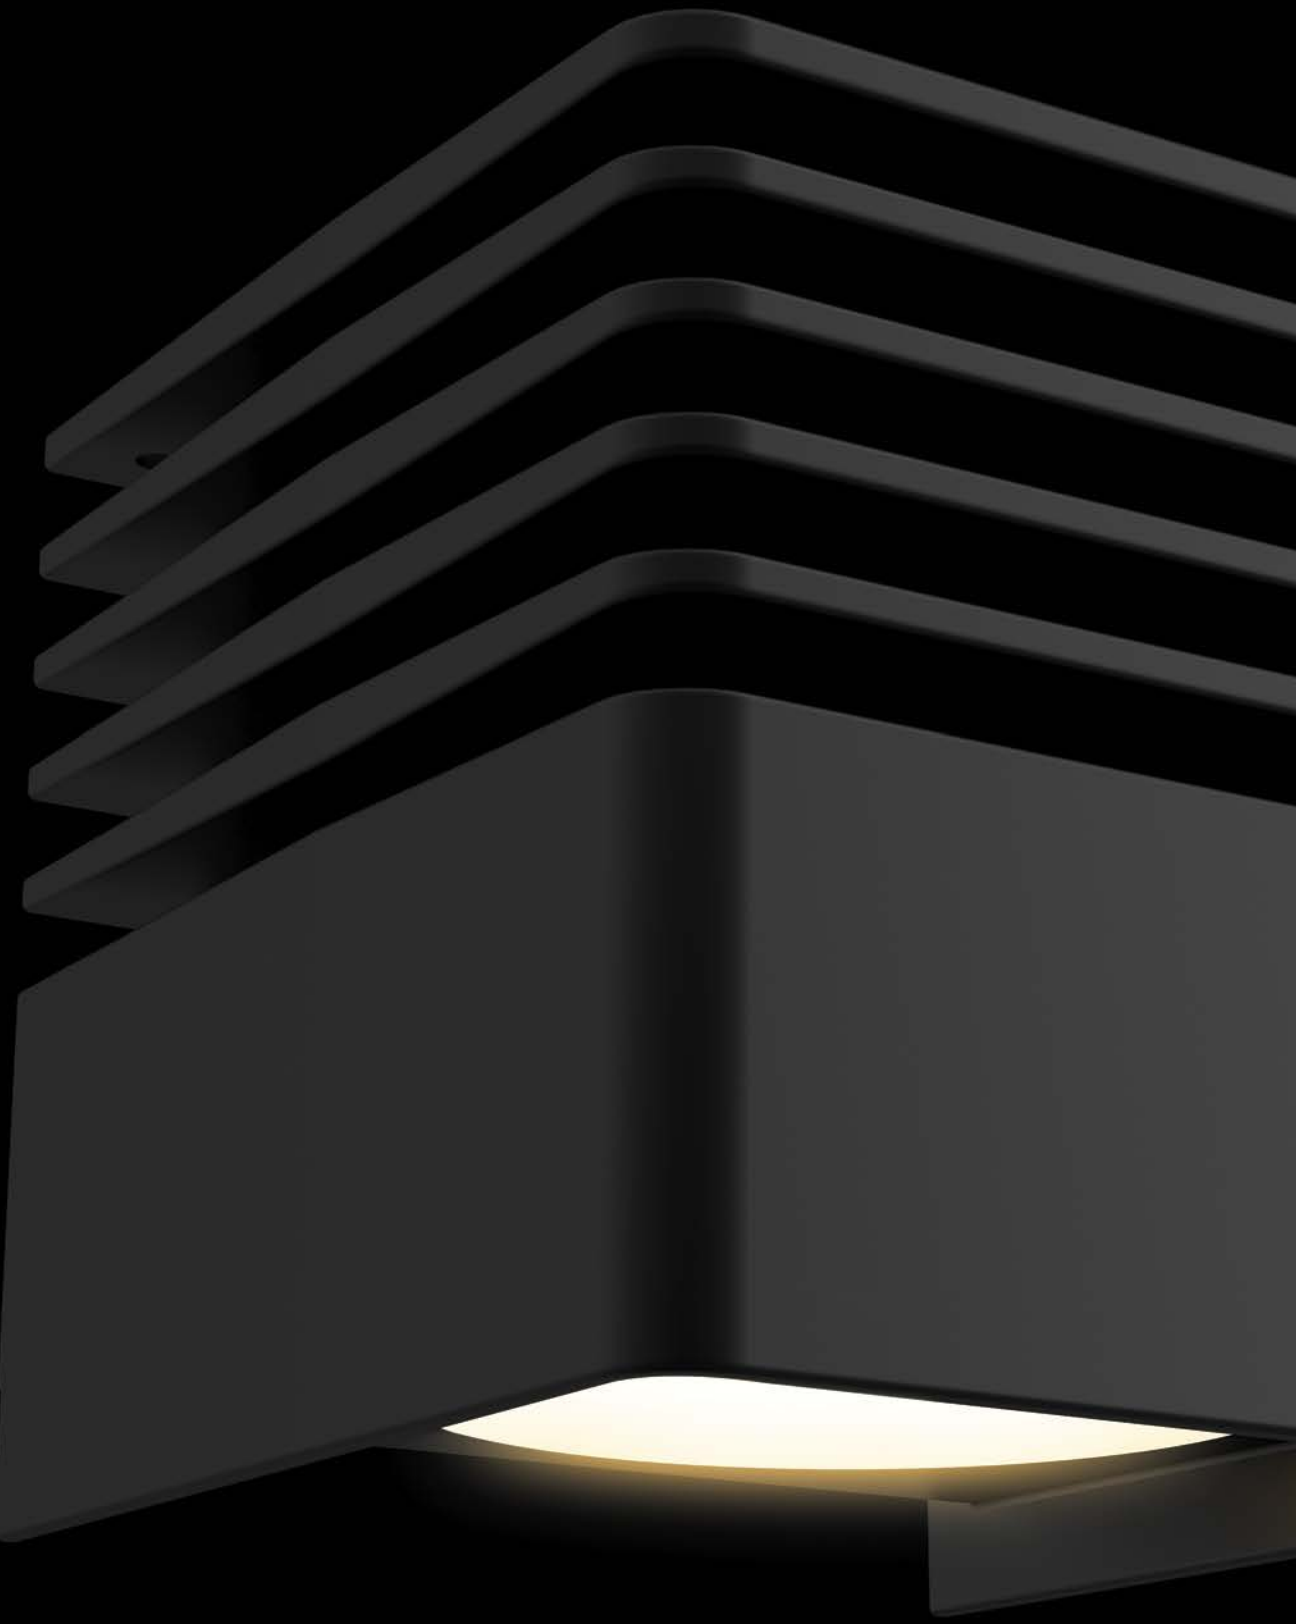

***sCrest**-13*

Lumens: 569-1,836
Input Voltage: 110V-277V
Material: Aluminum
Height: 11.5" /29.3 cm
Width: 5.0" /12.7 cm
Finishes: BZ, SV, FB, FW, RL

***sStrip**-17*

Lumens: 75
Input Voltage: 10-15V
Material: Brass/Stainless
Width: 6.7"/17.0 cm
Height: 0.9"/2.2 cm
Depth: 3.6"/9.2 cm
Finishes: BZ, SV, FB,
FW, RL, CU, BS, SS, AB, AT

***sQuad**-8 (a)*

Lumens: 65-400
Input Voltage: 10-15V
Material: Brass or Aluminum
Height: 3.3"/8.4 cm
Width: 3.2"/8.1 cm
Finishes: BZ, SV, FB,
FW, RL, CU, BS, AB, AT

Options

Copper Sleeve

***sDrum**-8 (a)*

Lumens: 65-400
Input Voltage: 10-15V
Material: Brass or Aluminum
Height: 3.3"/8.4 cm
Width: 3.2"/8.1 cm
Finishes: BZ, SV, FB,
FW, RL, CU, BS, AB, AT

Options

Hanging Bracket

Copper Sleeve

***sShell**-9 (a)*

Lumens: 50
Input Voltage: 10-15V
Material: Brass or Aluminum
Height: 15.5"/39.4 cm
Diameter: 4.7"/11.9 cm
Finishes: BZ, SV, FB,
FW, RL, AB, AT

sBBQ

Lumens: 82
Material: Stainless Steel
Length: 24.0"/61.0 cm
Diameter: Head 1.8"/5.4 cm
Base 3.6"/9.4 cm
Finishes: SS

recessed fixtures

*r**Nook**-16*

Lumens: 202-586
Input Voltage: 110-277V
Material: Aluminum
Height: 11.2"/28.5 cm
Width: 11.2"/28.5 cm
Exposed Depth: 0.125"/0.3 cm
Finishes: BZ, SV, FB, FW, RL

*r**Echo**-6rd*

Lumens: 16
Input Voltage: 10-15V
Material: Brass
Height: 2.5"/6.4 cm
Diameter: 1.5" conduit
Finishes: BS, BZ, SV, FB, FW, RL, AB, AT

*r**Echo**-6sq*

Lumens: 16
Input Voltage: 10-15V
Material: Brass
Height: 2.5"/6.4 cm
Diameter: 1.5" conduit
Finishes: BS, BZ, SV, FB, FW, RL, AB, AT

*r**Echo**-6st*

Lumens: 39
Input Voltage: 10-15V
Material: Brass
Height: 2.5"/6.4 cm
Diameter: 1.5" conduit
Finishes: BS, BZ, SV, FB, FW, RL, AB, AT

*r**Echo**-6ww*

Lumens: 4
Input Voltage: 10-15V
Material: Brass
Height: 2.5"/6.4 cm
Diameter: 1.5" conduit
Finishes: BS, BZ, SV, FB, FW, RL, AB, AT

*r**Echo**-8rd*

Lumens: 34-84
Input Voltage: 10-15V
Material: Brass
Height: 3.3"/8.3 cm
Diameter: 2.0" conduit
Finishes: BS, BZ, SV, FB, FW, RL, AB, AT

*r**Echo**-8sq*

Lumens: 34-84
Input Voltage: 10-15V
Material: Brass
Height: 3.3"/8.3 cm
Diameter: 2.0" conduit
Finishes: BS, BZ, SV, FB, FW, RL, AB, AT

*r**Echo**-8st*

Lumens: 68-169
Input Voltage: 10-15V
Material: Brass
Height: 3.3"/8.3 cm
Diameter: 2.0" conduit
Finishes: BS, BZ, SV, FB, FW, RL, AB, AT

*r**Echo**-8ww*

Lumens: 13-33
Input Voltage: 10-15V
Material: Brass
Height: 3.3"/8.3 cm
Diameter: 2.0" conduit
Finishes: BS, BZ, SV, FB, FW, RL, AB, AT

*r**Strata**-13*

Lumens: 4
Input Voltage: 10-15V
Material: Copper
Height: 3.5"/8.9 cm
Width: 5.0"/12.7 cm
Depth: 3.9"/9.8 cm
Finishes: CU, BZ, SV, FB, FW, RL, AB, AT

*r**Strata**-23*

Lumens: 6
Input Voltage: 10-15V
Material: Copper
Height: 3.5"/8.9 cm
Width: 9.0"/22.9 cm
Finishes: CU, BZ, SV, FB, FW, RL, AB, AT

*r**Fin**-13*

Lumens: 10
Input Voltage: 10-15V
Material: Brass
Height: 3.5"/8.9 cm
Width: 5.0"/12.7 cm
Finishes: BS, BZ, SV, FB, FW, RL, AB, AT

*r**Fin**-23*

Lumens: 25
Input Voltage: 10-15V
Material: Brass
Height: 3.5"/8.9 cm
Width: 9.0"/22.9 cm
Finishes: BS, BZ, SV, FB, FW, RL, AB, AT

pendant fixtures

*p**Shimmer**-4 (a)*

Lumens: 55
Input Voltage: 10-15V
Material: Aluminum or Copper/Brass
Height: 3.3"/8.3 cm
Diameter: 1.6"/4.1 cm
Finishes: BZ, SV, FB, FW, RL, CU, AB, AT

Options

Powder Coated Housing

*p**Shimmer**-6a*

Lumens: 90-210
Input Voltage: 10-15V
Material: Aluminum
Height: 3.3"/8.3 cm
Diameter: 2.3"/5.9 cm
Finishes: BZ, SV, FB, FW, RL, CU, AB, AT

Options

Copper Sleeve

Perforated Long Sleeve
Height: 10.9"/27.7 cm

in-grade fixtures

*n**Beckon**-23*

Lumens: 646-1,871
Input Voltage: 110-277V
Material: Aluminum
Height: 15.7"/39.9 cm
Diameter: 10.5"/26.7 cm
Finishes: BZ, SV, FB, FW, RL

Options

Cowling
Height: 3"/7.6 cm

*n**Column**-10*

Lumens: 80-420
Input Voltage: 10-15V
Material: Brass
Height: 5.2"/13.2 cm
Diameter: 4.0"/10.2 cm
Finishes: BS, BZ, SV, FB, FW, RL, AB, AT

Options

Louver Grate
Height: 5.4"/13.7 cm

Cowling Grate
Height: 6.1"/15.5 cm

Ground Wash
Height: 5.7"/14.5 cm

*n**Vault**-15 (a)*

Lumens: 130-320
Input Voltage: 10-15V
Material: Brass or Aluminum
Height: 9.2"/23.4 cm
Diameter: 6.4"/16.3 cm
Finishes: BS, BZ, SV, FB, FW, RL, AB, AT

*n**Sola***

Lumens: 200-365
Input Voltage: 10-15V
Lamp: MR-16
Material: Brass
Height: 12.3"/31.1 cm
Diameter: 6.4"/16.3 cm
Finishes: BS

underwater fixtures

holmlighting.com

***u*Tide**

Lumens: 40-378
Input Voltage: 10-15V
Material: Brass
Length: 6.4"/16.3 cm
Height: 5.3"/13.4 cm
Diameter: 4.1"/10.3 cm
Finishes: BS

***u*Pebble-7**

Lumens: 74-147
Input Voltage: 10-15V
Material: Brass
Height: 1.9"/4.8 cm
Diameter: 2.7"/6.9 cm
Finishes: BS

accessories

Mounting Options



Super J-Box
2.5"|6.4cm x 12"|30.5cm

Post Mount
2.5"|6.4cm x 13"|33cm

Ground Mount
120V to 12V

Versa Box
2.2"|5.7cm x 1.5"|3.9cm



Mini J-Box
3.5"|8.9cm x 1.3"|3.4cm



Tree Box
5.4"|13.8cm x 1.9"|4.9cm



Gutter Mount
4.0"|10.2cm x 4.0"|10.2cm



Wall Plate (1-Gang)
4.0"|10.2cm x 4.0"|10.2cm



Wall Plate (Round)
5.0"|12.7cm Diameter



Wall Mount
3.5"|8.9 cm x 2.0"|5.1 cm



Mini-Mount
2.6"|6.7 cm x 1.5"|3.8 cm

Coupling Options

Straight
1.3"|3.2cm x 2.0"|5.1cm

90° Elbow
1.3"|3.2cm x 2.0"|5.1cm



T-Mount
1.3"|3.2cm x 2.0"|5.1cm

Riser Options

Straight
0.8"|2.1cm Diameter



Sign Light
0.8"|2.1cm Diameter

Lens Options

Hex Baffle

Linear Spread Lens

Solite Spread Lens

Recessor Ring

holm

A Hunter Industries Company

Our mission is to create the most energy-efficient lighting products in the world while maintaining the highest level of quality and reliability. In every instance we will back our innovations with the unwavering support our customers need to succeed.

Gregory R. Hunter, President of Hunter Industries

Website holmlighting.com | **Customer Support** 844-200-4656

This brochure was printed on Forest Stewardship Council® (FSC®) certified paper with soy inks. The FSC is an international organization established to promote the responsible management of the world's forests.

© 2017 Hunter Industries Incorporated *Please recycle.*

HL-007-PG-EN B 8/17

MIX
Paper from responsible sources
FSC® C006076